
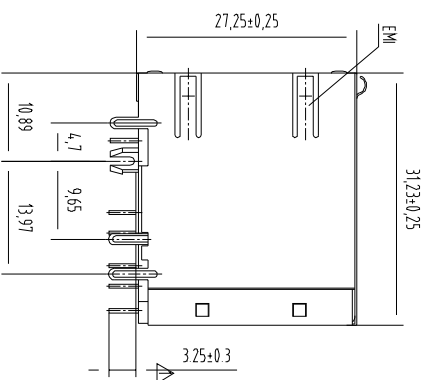


RoHS Compliant

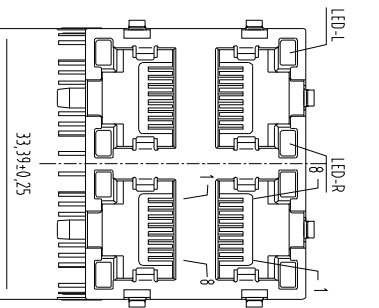



NOTES:

MATERIAL:

- | | |
|---------------------|--|
| 1. HOUSING MATERIAL | :PBT,PA66,PA46(UL 94V-0) |
| 2. CONTACT MATERIAL | :ROUND PINS-0.46mm DIAMETER PHOSPHOR BRONZE;
GOLD PLATING OVER NICKEL |
| 3. SHIELD | :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED |
| 4. LED | :OPTION |

ELECTRICAL/PHYSICAL:

- | | |
|--|---------------------------|
| 1. VOLTAGE RATING | :125 VAC RMS |
| 2. CURRENT RATING | :1.5 AMP |
| 3. CONTACT RESISTANCE | :30 MILLIOHMS MAX2 |
| 4. INSULATION RESISTANCE | :500 MEGOHMS MIN @500V DC |
| 5. DIELECTRIC WITHSTANDING
RISISTANCE | :1000V AC RMS 60HZ 1MIN |
| 6. DURABILITY | :750 CYCLES MIN |
| 7. TEMPERATURE | : -40 ° C / +85° C |

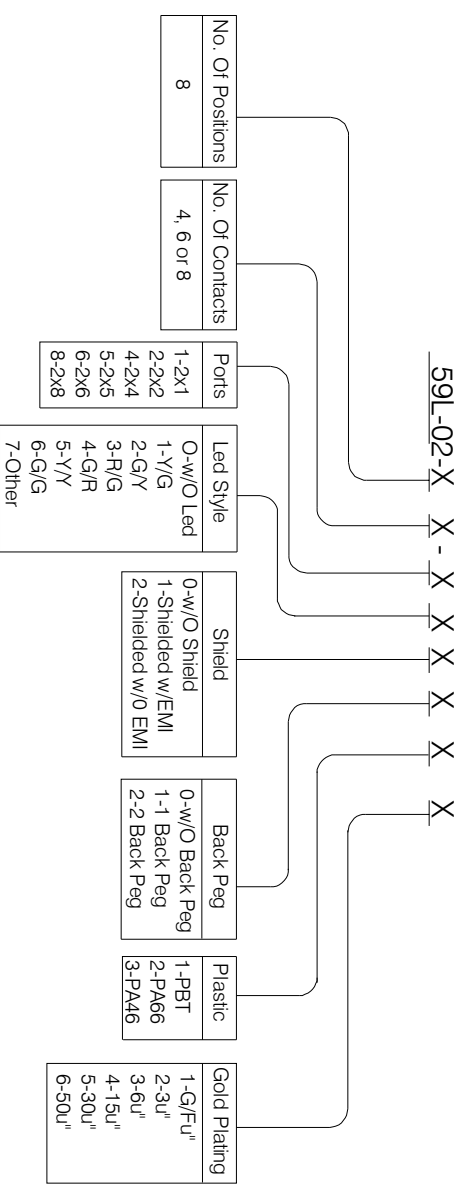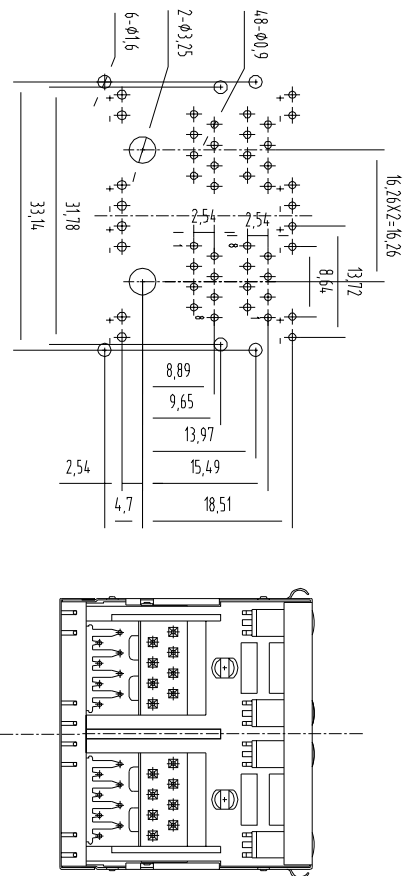

PC Board Layout

Component Side Shown

	NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Nina	DATE MAY-06-12	HENGLIAN ELECTRONIC TECHNOLOGY CO., LTD 恒 连 电 子 科 技 有 限 公 司 http://www.chinarj45.com
RJ45 LED SIDE ENTRY PCB JACK	 THIRD ANGLE PROJECTION	LINEAR	MM INCH	$.00 \pm 0.01$ $.000 \pm 0.005$ $.0000 \pm 0.002$	CKD Jack	MAY-06-12	
DWG. NO.	MM INCH	ANGLE +0° 30'	RADIL	+0.45 -0.15	APPD Jack	MAY-06-12	
HL012052092							