

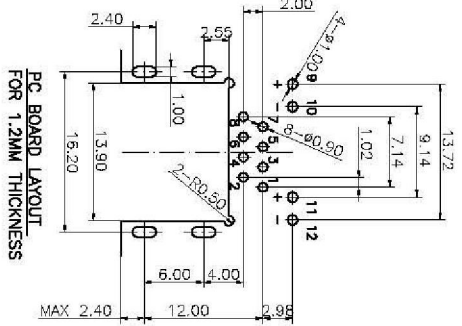
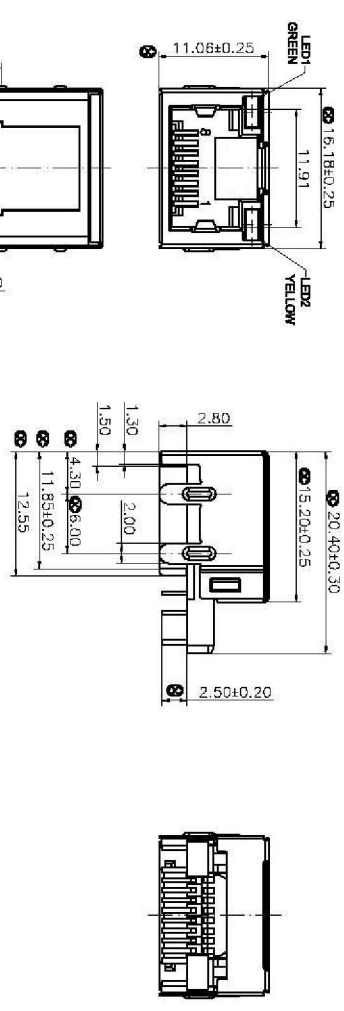


REV	变更内容	日期	制图	审核
A	图面新发行	2013/09/07	Iv wei	Oscar

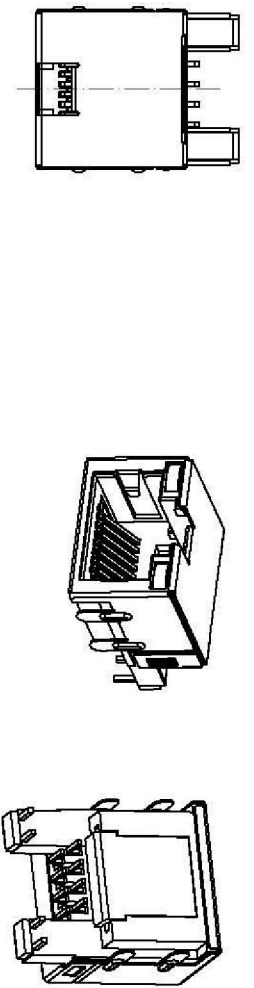

NOTES:
ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 500 VAC RMS 50Hz, 1MIN.
6. LEAD RATINGS : FORWARD VOLTAGE: 2.2 VOLTS TYPICAL. REVERSE VOLTAGE: 5 VOLTS MAXIMUM.

MECHANICAL:
1. HOUSING MATERIAL : LCP U94V-0 (BRACK COLOR)
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm (C5191)
3. PLATING : GOLD-PLATED IN THE CONTACT AREA
4. SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING N. 20u" Min.
5. LED - OPTION
6. OPERATING LIFE : 750 CYCLES MIN.
7. PCB RETENTION PRE-SOLDER : 1 LB MIN.
8. PCB RETENTION POST-SOLDER: 10 LBS MIN.
ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO +70°C.
3. IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C~265°C 5~10 SECONDS.
4. ROHS COMPLIANT
FCC PART 6B, SUBPART F
MATES WITH MODULAR PLUG CONFORMING TO

PART NUMBER: 6105 01 - 2188131X

B1 系列: 规格
F系列: 规格
01-规格 H=11.06mm 规格
02-规格 H=11.25mm 规格
03-规格 H=11.40mm 规格
SHIELD TYPE
1 - W/O SHIELD
2 - 有屏蔽
3 - 有屏蔽
4 - 有屏蔽
5 - 有屏蔽

Gold Plating μ"
1 - 1μ" 2 - 2μ" 3 - 3μ"
4 - 6μ" 5 - 15μ" 6 - 30μ"
7 - 50μ"
LOGO& PCB TYPE
0 - 无
1 - W/ UL LOGO

PORTS:
1 - 1X1 PORT
A - 2X1 PORT
C - 2X4 PORTS
Position
6 - 6 POSITION
8 - 8 POSITION
CONTACT :
1 - 4 CONTACTS
B - 8 CONTACTS

Plastic Material& Color
1 - PBT+20%GF Black
2 - NYLON46 Black
3 - LCP Black
LED STYLE :
0 - W/O LED
1 - L LED: GREEN, R LED: YELLOW(规格)
2 - L LED: YELLOW, R LED: GREEN (规格)
3 - L LED: GREEN&ORANGE, R LED: GREEN (规格)
4 - L LED: RED, R LED: GREEN(规格)
PEG/TAB &BACK PEG (规格)
0 - W/O PEG 1 - W/PEG

1 - 1X1 PORT
A - 2X1 PORT
C - 2X4 PORTS
Position
6 - 6 POSITION
8 - 8 POSITION
CONTACT :
1 - 4 CONTACTS
B - 8 CONTACTS

Plastic Material& Color
1 - PBT+20%GF Black
2 - NYLON46 Black
3 - LCP Black
LED STYLE :
0 - W/O LED
1 - L LED: GREEN, R LED: YELLOW(规格)
2 - L LED: YELLOW, R LED: GREEN (规格)
3 - L LED: GREEN&ORANGE, R LED: GREEN (规格)
4 - L LED: RED, R LED: GREEN(规格)
PEG/TAB &BACK PEG (规格)
0 - W/O PEG 1 - W/PEG

DIMENSION IN mm [Inch]		恒连电子科技有限公司	
TOLERANCE UNLESS OTHERWISE SPECIFIED	公差	FILE NO. T10A017	DWG NO. 6105-8P-001
.X ± 0.20	X ± 1°	TITLE 6105-8P8C LED JACK (H=11.06mm)	
.XX ± 0.15	.X ± 0.5°	APPROVE Oscar	CHECK DL
.XXX ± 0.075		制图 Iv wei	审核 1:1 比例 A3 幅面 A